


**SFLY 2,5/D32**

Order No.: 2285467

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2285467>Screw socket, Nominal current: 4 A, Number of positions: 32, Pitch:  
5.08 mm, Color: green**Commercial data**

GTIN (EAN)	
sales group	E311
Pack	10 pcs.
Customs tariff	85369010
Catalog page information	Page 532 (CC-2009)

**Product notes**WEEE/RoHS-compliant since:  
11/09/2007

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

**Technical data****Dimensions / positions**

Length	39.8 mm
Height	32.4 mm
Width	95 mm
Pitch	5.08 mm
Number of positions	32

Hole diameter	2.8 mm
Screw thread	M3
Tightening torque, min	0.5 Nm
Tightening torque max	0.6 Nm

**Technical data**

Range of articles	SFLY 2,5
Insulating material group	I
Rated surge voltage (III/3)	4 kV
Connection in acc. with standard	EN-VDE
Nominal current $I_N$	4 A
Nominal voltage $U_N$	250 V
Insulating material	PA
Inflammability class acc. to UL 94	V2
Stripping length	8 mm

**Connection data**

Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	4 mm <sup>2</sup>
Conductor cross section stranded min.	0.2 mm <sup>2</sup>
Conductor cross section stranded max.	2.5 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12

**Certificates / Approvals**


Certification

GOST

---

Diagrams/Drawings

Dimensioned drawing

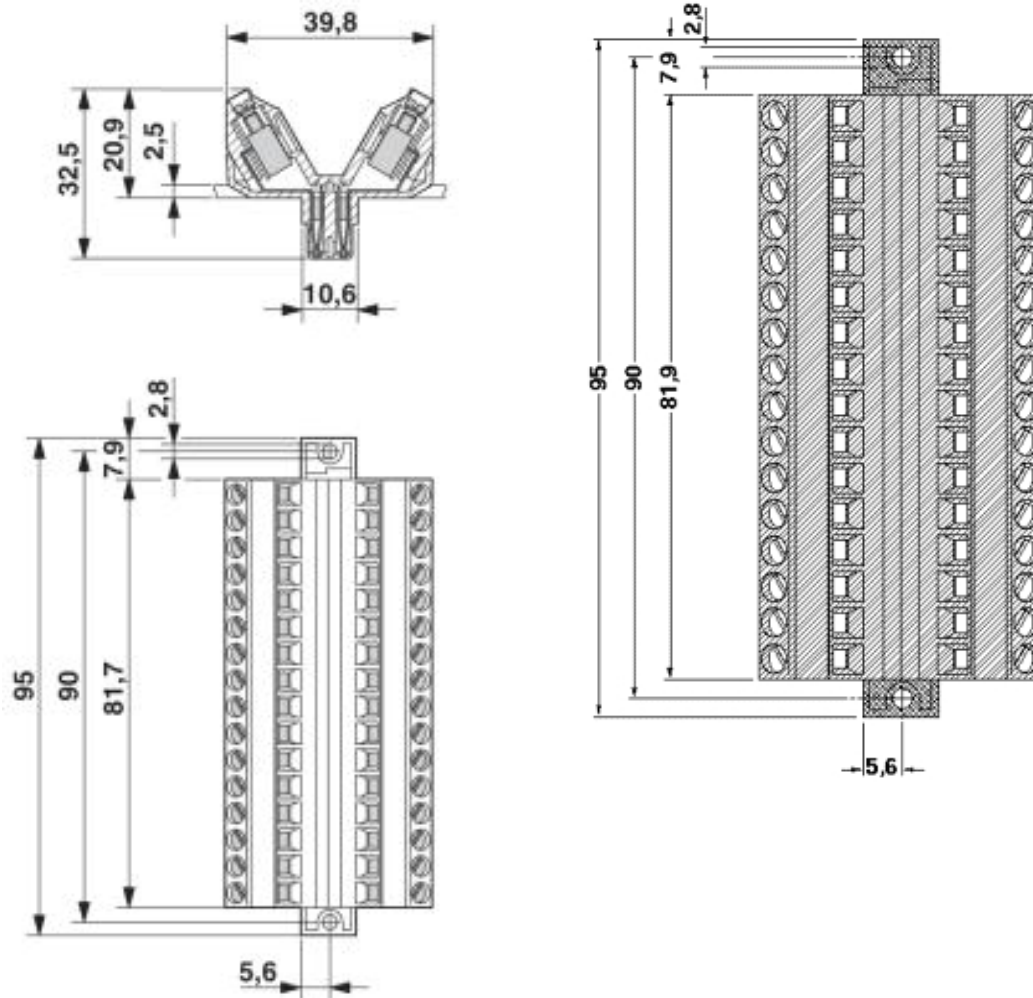

SFLY 2,5/D32 Order No.: 2285467

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2285467>

---

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact  
Technical modifications reserved;