

## SUMMARY

### # Wires

Low	2
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0



*Image is for illustrative purpose only*

### Download

[Request a quote](#)

[Catalog](#)

Series	C
Termination type	Female solder
IP rating	66
Cable Ø	5.30 - 7.20 mm
Matching parts	CFB.M02.GLA.C72GZ
Status	
Alternative part	

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	CS*: Free receptacle with cable collet, watertight (IP 66) and nut for fitting a bend relief
Keying	2 keys (gamma=60; Plug: male contacts; Receptacle: female contacts)
Housing Material	PSU (Polysulfone), gray
Cable Fixing	∅ 5.3 - 7.2 mm
Variant	

### Performance

Configuration	*B.M02 : 2 Low V.
Insulator	
Rated Current	30 Amps

### Specifications

Test voltage (kV rms) Contact-contact: 2.1  
Air clearance min. (mm) or Creepage distance min. (mm): 1.6

### Others


F ret (min): 150 N

F ret (max): 250 N  
Steam sterilization: 20 times  
IP Rating: 66

---

## DRAWINGS

### Draws

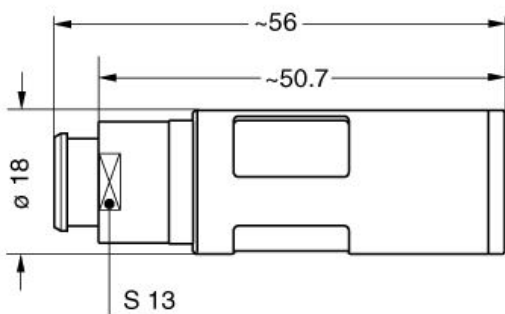

### Dimensions

	A	L
mm.	18	56
in.	0,71	2,20

---

## RECOMMENDED BY LEMO

### Tools

None

### Cables