


1. SCOPE

This specification covers the characteristics of size 0201, Base Metal X5R dielectric, 0.1 uF capacitance, +/- 10% tolerance, 10 VDC rated ceramic chip capacitors with nickel barrier (90% tin / 10% lead) termination.

2. DIELECTRIC CHARACTERISTICS - X5R (BW)

Operating Temperature Range:	-55°C to +85°C
Temperature Coefficient:	+/- 15% Change in capacitance @ 1 Vrms
Dissipation Factor:	10% Max. @ 25°C
Insulation Resistance, 25°C:	>10 Giga-Ohms
Dielectric Withstanding Voltage:	25 VDC
Aging Rate:	5% Typical
Test Parameters:	1KHz, 1.0 Volts +/- 0.2 Vrms, 25°C

3. PHYSICAL DIMENSIONS (NOT SCALED)

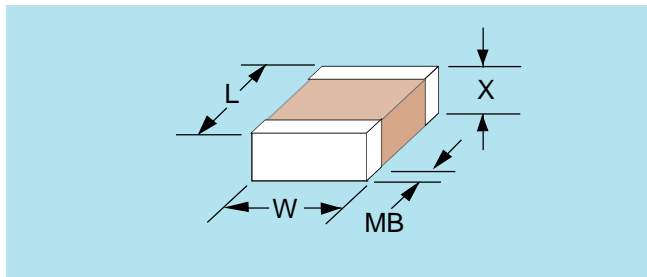

Dimensions	L	W	X	MB
Inches (mm)	.0235 (0.6)	.0118 (0.3)	.013 (0.33)	.006 (0.15)
+/- in (mm)	.0015 (0.03)	.0012 (0.03)	Max	.002 (0.05)

4. PART NUMBER DESCRIPTION

0201 BW 104 K 100 Y T

0201	= Size
BW	= X5R Dielectric (Base Metal Electrodes)
104	= Capacitance Code (pF): First two digits are significant, third digit denotes number of zeros
K	= Capacitance tolerance: K = +/- 10%
100	= DC Voltage Rating: First two digits are significant, third digit denotes number of zeros
Y	= Termination: Nickel Barrier with 90% Tin / 10% Lead
T	= Packaging: Tape and Reel

REVISION: A

NOVACAP P/N: 0201BW104K100YT
 CUSTOMER:
 CUST. P/N:

SPEC DESIGNER MK 5/25/17
 SPEC MANAGER MK FOR BN 5/25/17
 ENGINEERING MK FOR BN 5/25/17